


## Installation and Dimensions

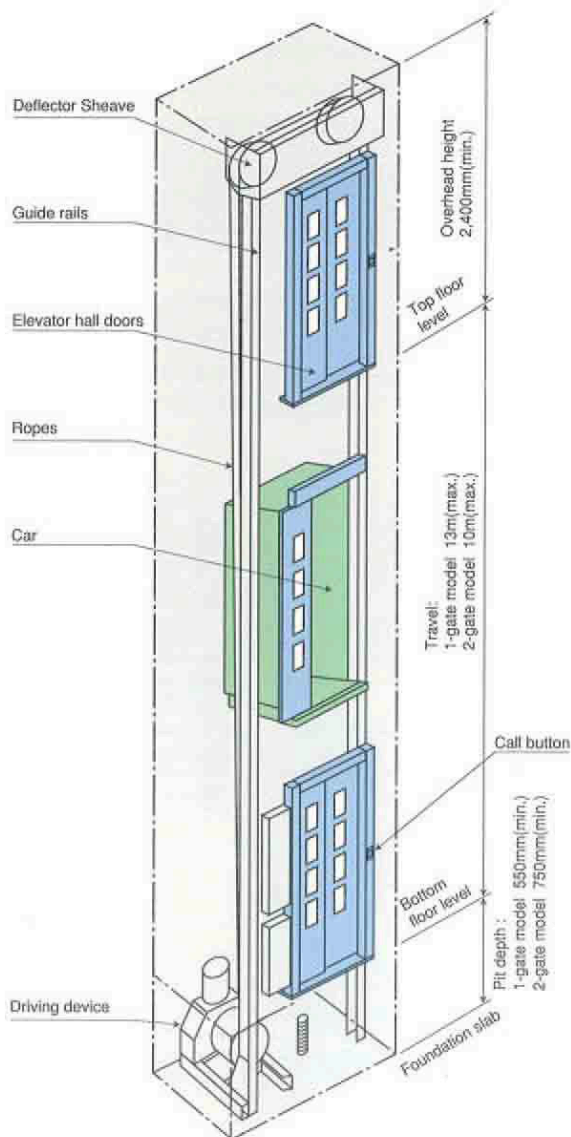

## Specification of HOME-ELEVATOR


Items	Contents	
<b>Basic Specifications</b>	Driving system	Basement Drum Type
	Rated load	3 Persons(200kg)
	Rated speed	20m/min
	Control system	VVVF inverter drive
	Stops	MAX. 5stops (2-gate model:Max.4stops)
	Travel	MAX. 13m (2-gate model:Max.10m)
	Door type	2-panel side sliding
	Power supply	200V single-phase(for drive) 3-wired 100V single-phase(for light) 2-wired
	Car internal dimensions	width × depth × height 900mm × 1150mm × 2000mm
	Entrance dimensions	width × height 800mm × 1900mm
Motor	2.3kW	
<b>Specifications of options</b>	Emergency buzzer button	
	Door safety shoe	
	Overload return door system (ORS)	
	Next drive operation [NXTD]	
	Standard functions	Extending of door opening time (MAX.3 minutes at both car and hall) Automatic rescue device for power failure(ARD) (In the event of normal power failure,the elevator power of a rechargeable battery moves the car to the nearest floor below.)
	Electric fan	Blowing type
	Handrail	Horizontal type
	Mirror	Rectangular type
	Wired glass windows	Doors with fire-proof windows.
	Earthquake Emergency Return(EEMO)	Upon activation of secondary wave seismic sensors, the car stops at the nearest floor, and parks there with the doors open to facilitate safe evacuation of passengers.
2-gate model	Only one side opening at each floor	
Additional Management Key Switch	For a floor other than the lowest floor	

Basic code : Japan code (JIS)




## Elevator shaft dimensions

1-gate model

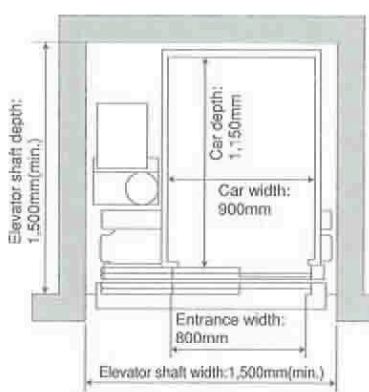

(For design with wooden housing,  
width:1,600mm × depth:1,550mm)

2-gate model

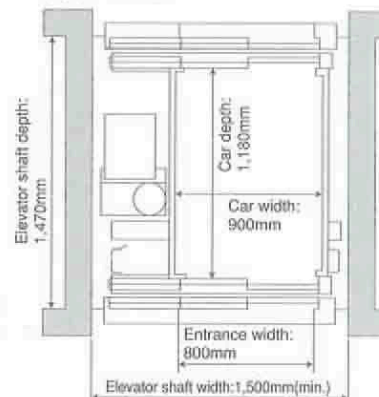

(For design with wooden housing,  
width:1,600mm × depth:1,470mm  
(Only one side opening at each floor))

# HITACHI

Hitachi, Ltd.  
14-1 Sotokanda 4-chome  
Chiyoda-ku, Tokyo, 101-8010 Japan  
TEL: +81-3-4564-3722  
FAX: +81-3-4564-3883  
<http://www.hitachi.co.jp/urbar/>